

Mott Porous Metal Data Sheet

Media Grade: 2
Type: Rolled Sheet
Alloy: 316LSS
Thickness: 0.062 inches

Issued: 06/22/10

Manufacturing Specifications

Bubble Point, inch water 17.0 - 24.0
 Minimum Tensile, kpsi 13.2
 Yield Strength, kpsi 10.8
 Young's Modulus, x 10⁶ psi 5.7

Permeability Coefficient

Liquid, K_L 3.5
 Gas, K_G 30


Liquid: Pressure Drop, psid =
 (K_L)(Flux, gpm/ft²)(Visc, cp)(Thck, inch)

Gas: Pressure Drop, psid =
 (K_G)(Flux, acfm/ft²)(Visc, cp)(Thck, inch)

Particle Removal Efficiency


Liquid Efficiency Testing per ASTM F795
 90% at 4 μm Tested at 1 gpm/ft²
 99% at 5.5 μm
 99.9% at 9 μm

Air Efficiency Tested at flux of 6 acfm/ft²
 90% at 0.3 μm
 99% at 0.6 μm
 99.9% at 2 μm

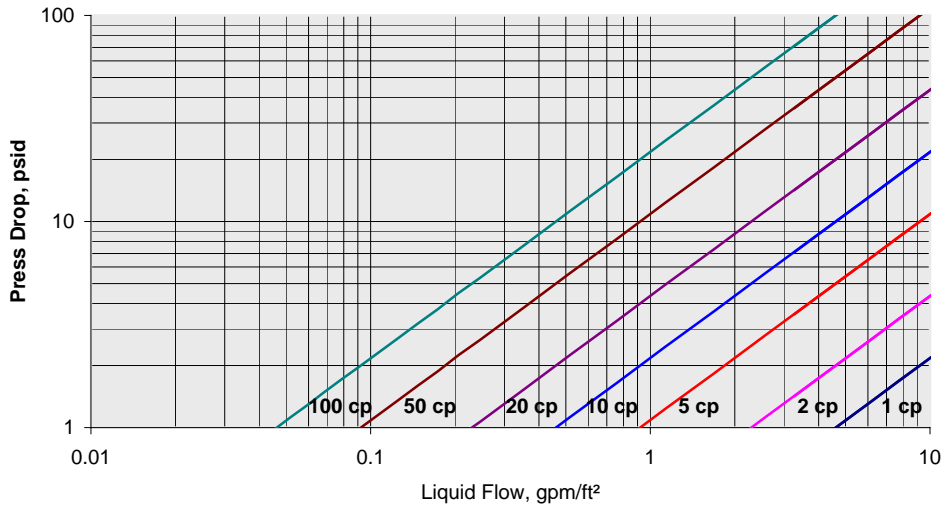

Notes:

- 1 - Tests run at 70 °F
- 2 - Tests run with water, other curves generated using Liquid Formula

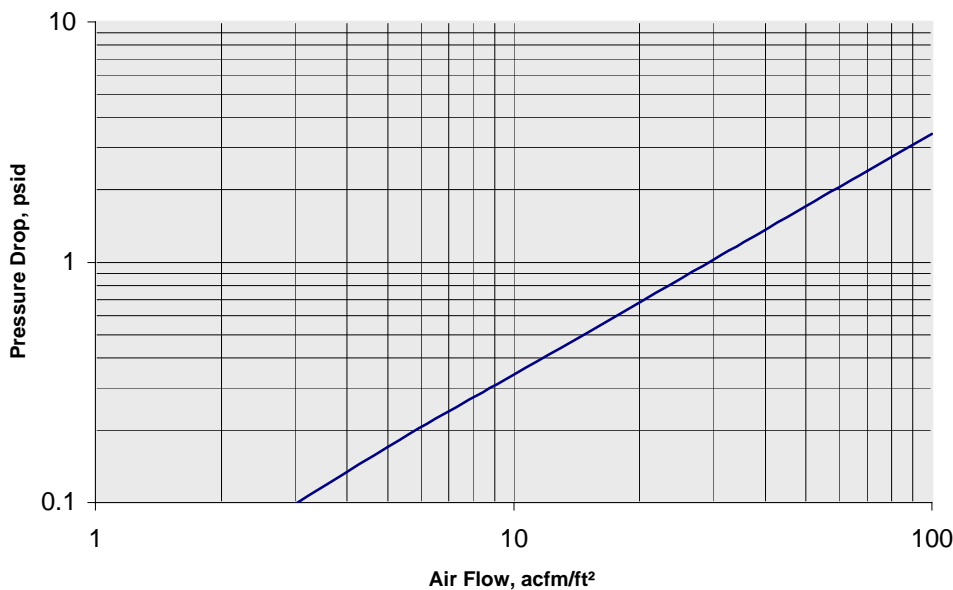

Notes:

- 1 - Tests run with air at 70 °F
- 2 - Tests run with upstream pressure exhausting to atmosphere

mott corporation

84 Spring Lane, Farmington, CT 06032-3159
 860-747-6333 Fax 860-747-6739
www.mottcorp.com

Flow Characteristics on these data sheets are typical and should be used for general reference only.